




Electric tow tractor **EZS 350**

Load capacity: 5000 kg


EZS 350

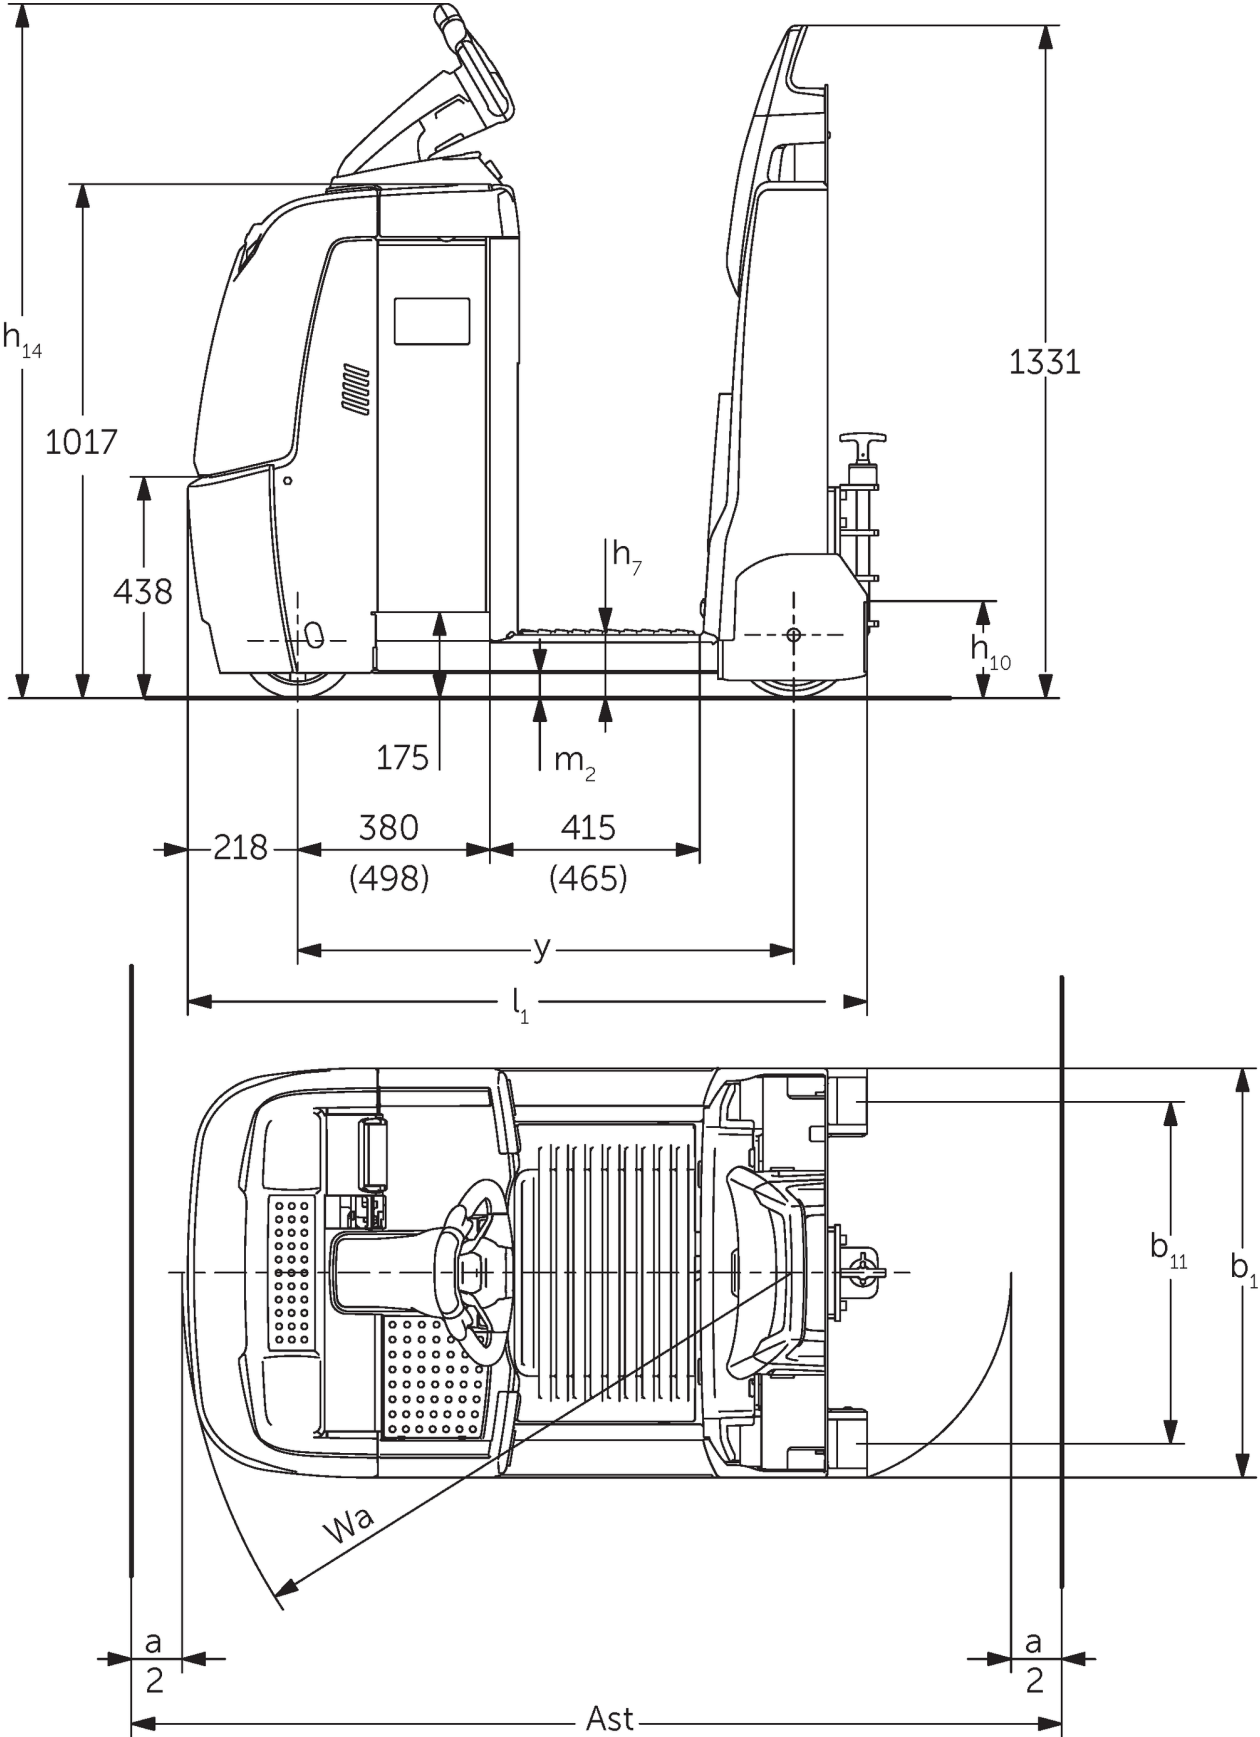

Technical drawing, data sheet, EZS 350

EZS 350

Pulling ability

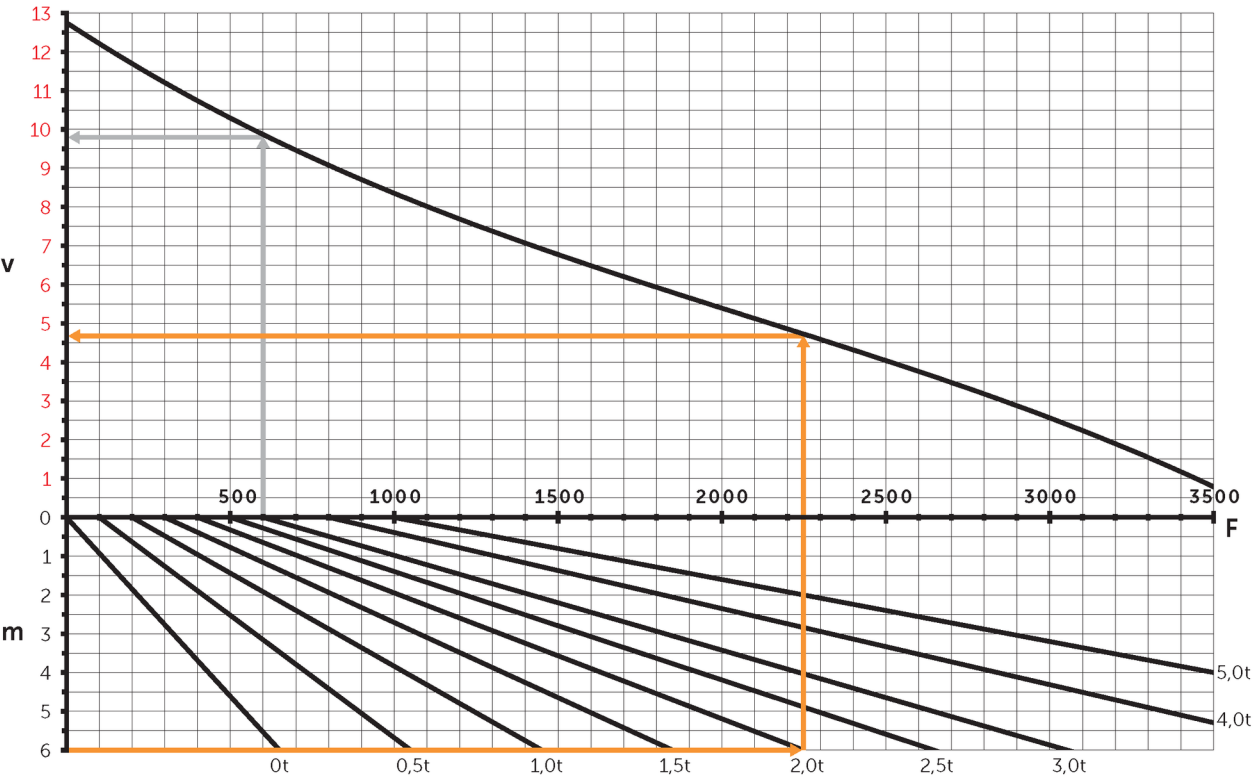

v =speed [km/h], m =incline [%], F =drawbar pull [N]

VDI table

Stand-on: 02/2021

Characteristic	1.1	Manufacturer (abbreviated description)		Jungheinrich			
	1.2	Manufacturer's type designation		EZS 350	EZS 350 L CKomfort	EZS 350 XL Std	EZS 350 XL Comfort
	1.3	Drive		Electric			
	1.4	Operation		Stand-on			
	1.5	Load capacity/load	Q kg	5000			
	1.7	Rated drawbar pull	N	1000			
	1.9	Wheelbase	y mm	980	1030	1098	1148
Weights	2.1.1	Service weight (incl. battery)	kg	996	1006	1091	1101
	2.3	Axle load unladen front/rear	kg	505 / 491	510 / 496	565 / 526	570 / 531
Wheels/suspension system	3.1	Tyres		Vu/Su			
	3.2	Tyre size, front		ø230 x 77			
	3.3	Tyre size, rear		ø250 x 80			
	3.5	Wheels, number front/back (x=driven)		1x/2			
	3.7	Tread width, rear	b ₁₁ mm	680			
Basic dimensions	4.8	Seat height/stand height	h ₇ mm	125			
	4.9	Height of tiller handle in drive position min./max.	mm	1374 /			
	4.12	Coupling height	h ₁₀ mm	158			
	4.19	Overall length	l ₁ mm	1350	1400	1468	1518
	4.21.1	Overall width	b ₁ mm	810			
	4.32	Ground clearance centre of wheelbase	m ₂ mm	50			
	4.35	Turning radius	W _a mm	1220	1270	1338	1388
Performance data	5.1	Travel speed laden/unladen	km/h	8 / 12.5			
	5.5	Drawbar pull laden/unladen	N	1000 /			
	5.6	Max. drawbar pull laden/unladen	N	3700 /			
	5.10	Service brake		generative			
E-motor/ Electronics	6.1	Drive motor, performance S2 60 min	kW	2.8			
	6.4	Battery voltage/nominal capacity	V / Ah	24 / 465		24 / 620	
	6.5	Battery weight	kg	370		460	
	6.6.1	Energy consumption according to EN cycle	kWh/h	1.15			
	6.6.2	CO2 equivalent as per EN 16796	kg/h	0.6			
Other	8.1	Type of drive control		AC speedCONTROL			
	10.7	Sound level as per EN12053, operator's ear	dB (A)	66			

- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.

- 4.9: Height of jetPILOT - 4.12: other coupling heights available - 4.19: Overall length without coupling, as different coupling systems are available. - 5.1: see diagram - 5.5: Rated drawbar pull

The German production facilities in
Norderstedt, Moosburg and Landsberg
are certified.

ISO 9001
ISO 14001

Jungheinrich fork lift trucks meet
European safety requirements.



 **JUNGHEINRICH**